

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
23.05.2001 Bulletin 2001/21

(51) Int Cl.7: **D04H 3/10**

(21) Application number: **00310313.2**

(22) Date of filing: **21.11.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Kobayashi, Toshio, c/o Technical Center
Mitoyo-gun, Kagawa-ken, 769-1602 (JP)**
• **Tange, Satoru, c/o Technical Center
Mitoyo-gun, Kagawa-ken, 769-1602 (JP)**

(30) Priority: **22.11.1999 JP 33179399**

(74) Representative: **Parry, Christopher Stephen
Saunders & Dolleymore,
9 Rickmansworth Road
Watford, Herts. WD18 0JU (GB)**


(71) Applicant: **UNI-CHARM CORPORATION
Kawanoe-shi Ehime-ken (JP)**

(54) **Nonwoven fabric of polypropylene fiber and process for making the same**

(57) A nonwoven fabric 26 is formed by continuous fibers 15 of polypropylene having a fineness of 0.006 -

5.8 d, a birefringence of 0.019 - 0.030 and a tensile breaking extension of 100 - 300 %.

FIG.1

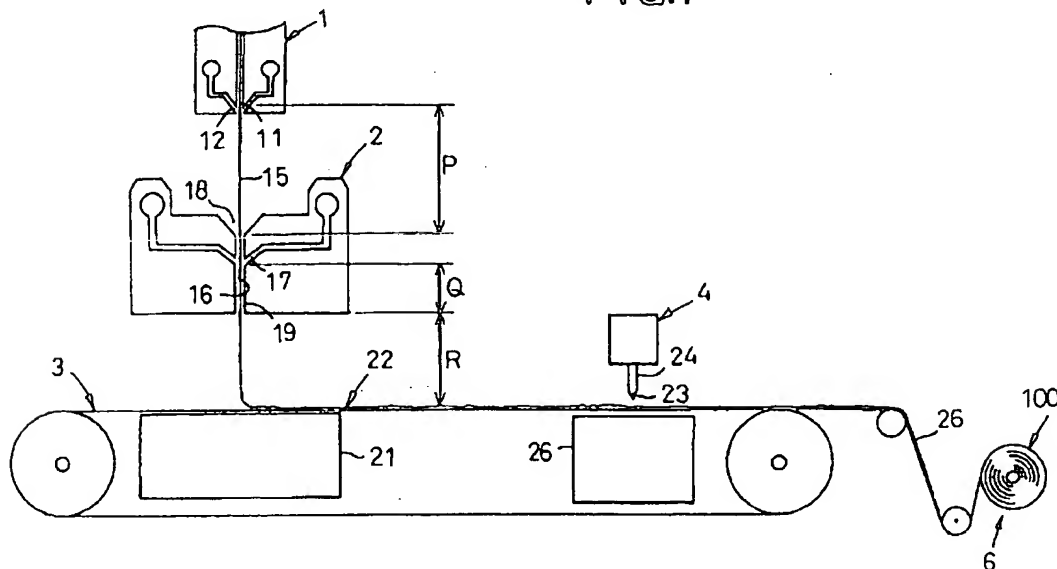

EP 1 101 854 A1

EP 1 101 854 A1

2

Description

[0001] This invention relates to a nonwoven fabric made of continuous polypropylene fiber and to a process for making the same.

[0002] Japanese Patent No. 2887611 describes a process for making a nonwoven fabric of continuous microfibers having a fineness less than 1 denier. According to the process described in this Patent, continuous microfibers are stretched once on a step of melt spinning and then stretched again until its fineness is reduced to a desired value. The continuous microfibers having a fineness thereof reduced in this manner are collected and bonded together, for example, by adhesion to obtain the desired nonwoven fabric.

[0003] The prior art described above offers a nonwoven fabric comprising continuous microfibers of a fineness sufficiently reduced to ensure a comfortable soft touch. This invention aims to add this comfortable soft touch nonwoven fabric with a high breaking extension.

[0004] The object set forth above is achieved by a first aspect of this invention relating to the product, on one hand, and by a second aspect of this invention relating to the process for making this product.

[0005] Specifically, the object set forth above is achieved, according to its first aspect, by an improvement in the nonwoven fabric made of continuous polypropylene fiber.

[0006] The improvement according to the first aspect of this invention is in that the continuous fibers have a fineness of 0.006 ~ 5.8 deniers, a birefringence of 0.019 ~ 0.030 and a tensile breaking extension of 100 ~ 300 % wherein the fibers are subjected to substantially mechanical entanglement to maintain the form of a nonwoven fabric.

[0007] According to one preferred embodiment of the first aspect, said nonwoven fabric has a tensile strength of 1 ~ 3 g/d.

[0008] The object set forth above is achieved, according to the second aspect of this invention, by an improvement in the process for making a nonwoven fabric comprising the steps of stretching the continuous polypropylene fibers extruded from a plurality of nozzle orifices, accumulating the continuous polypropylene fibers on a belt travelling in one direction and entangling the continuous fibers together to obtain a desired form of a nonwoven fabric.

[0009] The improvement according to the second aspect of this invention is in by that the process comprises the steps of heating a region of an extruder in the vicinity of said nozzle substantially at a temperature of said continuous fibers being extruded in molten state, guiding the continuous fibers through guide passage of a sucker extending through between in- and outlet thereof and being supplied with compressed air at the normal temperature discharged in a direction defined from the inlet toward the outlet, stretching the continuous fibers along a path extending between the nozzle and the sucker and

thereby reducing a fineness of the continuous fibers, and orienting polypropylene molecules sufficiently to obtain a desired birefringence.

[0010] Fig. 1 is a diagram schematically illustrating the process for making a nonwoven fabric.

[0011] Details of a nonwoven fabric and a process for making the same according to this invention will be more fully understood from the description given hereunder with reference to the accompanying drawing.

[0012] Fig. 1 is a diagram schematically illustrating the process for continuously making nonwoven fabric 100 using a melt spinning machine 1, a sucker 2, an endless belt conveyor 3, a high pressure water jet ejector 4 and a take-up roller 6.

[0013] The melt spinning machine 1 includes a material feed hopper and a screw feed extruder (not shown), the latter being provided at its forward end with spinning nozzle 11 and hot blast blow-off orifices 12 on both sides of the nozzle 11. As material, polypropylene having MFR, for example, of 10 ~ 80 g/10 min is used. 600 orifices of the nozzle 11 each having an orifice diameter, for example, of 0.35 mm are arranged in line at the orifice pitch of 1 mm in a direction perpendicular to the plane of the drawing. Continuous polypropylene fiber 15 is discharged through each of these orifices of the nozzle 11 at a rate of 0.13 ~ 0.40 g/min/nozzle. The blow-off orifices 12 breathe out hot blast substantially at the same temperature as a temperature of polypropylene being discharged in molten state, i.e., at a temperature of approximately 230°C on the assumption that polypropylene is discharged through the nozzle 11 at a temperature of approximately 230°C. The hot blast is breathed out at a rate of 1 ~ 3 Nm³/min and prevents polypropylene being extruded from being rapidly cooled.

[0014] The sucker 2 has guide passage 16 for the continuous fibers 15 and blow-off orifices 17 opening into the guide passage 16 from both sides thereof to breathe out compressed air at the normal temperature. The guide passage 16 has an inlet 18 and an outlet 18 for the continuous fibers 15. The sucker 2 is positioned so that a distance P between the nozzle 11 and the inlet 18 of the sucker 2 is 500 mm or less, preferably 100 ~ 300 mm. The continuous fibers 15 travelling over the distance P preferably have a temperature falling nearly to the melting point thereof as the continuous fibers 15 reach the inlet 18. Over a distance Q between the blow-off orifices 17 and the outlet 19, the continuous fibers 15 are supplied with compressed air at the normal temperature breathed out toward the outlet 19. The distance Q is preferably in a range of 20 ~ 500 mm and the expression "normal temperature" used herein should be understood to be the temperature in a range of 10 ~ 50°C. The compressed air is of 0.5 ~ 2 kgf/cm²G and supplied at a flow rate of Nm³/min. The continuous fibers 15 entering the guide passage 16 are quenched by the compressed air at the normal temperature nearly to the normal temperature and, at the same time, stretched appropriately to achieve a fineness of 0.006 ~ 5.8 deniers

EP 1 101 854 A1



and a birefringence Δn of 0.019 ~ 0.030. After stretched in this manner, the continuous fibers 15 preferably have a tensile strength of 1 ~ 3 g/d.

[0015] The endless conveyor belt 3 has its width extending in the direction orthogonal to the plane defined by the drawing. A distance R between the nozzle 11 and the conveyor belt 3 is dimensioned preferably in a range of 300 ~ 1500 mm, more preferably in a range of 400 ~ 600 mm by correspondingly adjusting the distances P and Q. The conveyor belt 3 travels rightward as viewed in the drawing at a speed of 2 ~ 8 m/min. The conveyor belt 3 is made of material having a breathable nature and a suction box 21 is opposed to the sucker 2 with this conveyor belt 3 therebetween. The continuous fibers 15 emerging from the outlet 19 swing transversely as well as longitudinally of the conveyor belt 3 under the effect of compressed air and suction. Consequently, the continuous fibers 15 are accumulated on the conveyor belt 3 in an irregular pattern to form web 22.

[0016] The high pressure water jet ejector 4 has single or dual or more nozzle array(s) 24 each comprising a plurality of orifices 23 arranged in line transversely of the conveyor belt 3 at a pitch of 0.3 ~ 3 mm and a suction box 26 opposed to these nozzle array(s) with the conveyor belt 3 therebetween. In the case of dual nozzle arrays 24, for example, the orifices 23 of the first array may stabilize texture of the web 22 by ejecting water jet streams of 20 kgf/cm² and the orifices 23 of the second array serve may partially orienting the continuous fibers 15 so as to extend in a travelling direction of the web 22 or may partially intertwine the continuous fibers 15 with one another to improve a tensile strength of the web 22. The web 22 may be subsequently dried on a step of drying (not illustrated) to form nonwoven fabric 26 which is, in turn, taken up by the take-up roller 6 in the form of a roll.

[0017] The continuous fibers 15 and the nonwoven fabric 26 obtained through the above-mentioned series of steps under operating conditions as will be described have presented physical properties as follow:

(Operating conditions)

[0018]

Resin used as the starting material: Polypropylene
(MFR = 70 g/10 min)
Spinning nozzle:

Orifice diameter: 0.35 mm
Number of orifices: 600
Orifice pitch: 1 mm
Temperature: 230°C
Discharge: 0.13 g/min/nozzle

Hot blast:

Temperature: 230°C

Flow rate: 1.5 Nm³/min

Compressed air at the normal temperature:

Pressure: 1.0 kgf/cm²G
Flow rate: 6.0 Nm³/min

Conveyor belt:

Distance from the spinning nozzle: 490 mm
Travelling speed: 4.4 m/min

High pressure water jet ejection:

First array: at a pressure of 20 kgf/cm²
Second array: at a pressure of 100 kgf/cm²

(Physical properties of the continuous fibers)

[0019]

Average fiber diameter: 8.9 μ m (0.51 d)
Standard deviation of the fiber diameter: 1.03
Tensile strength: 1.72 g/d
Tensile breaking extension: 6.38 mm
Condition of tension:

Distance between chucks: 0 mm
Tensile speed: 10 mm/min

Birefringence (Δn): 0.027

(Physical properties)

[0020]

Basis weight: 34.2 g/m²
Thickness (under a measuring load of 3 g/cm²): 0.48 mm
Tensile strength in MD (machine direction): 16550 g/width of 50 mm
Tensile breaking extension in MD: 193 %
Tensile strength in CD (cross direction): 8248 g/width of 50 mm
Tensile breaking extension in CD: 197 %
Condition of tension:

Distance between chucks: 10 mm
Tensile speed: 10 mm/min

[0021] As will be apparent from the physical properties of the continuous fibers and the nonwoven fabric as indicated above, the novel process for making a nonwoven fabric enables the continuous fibers 15 to have a relatively small fineness, e.g., of 0.006 ~ 05.8 d and, at the same time, enables unevenness possibly occurring in the fineness to be alleviated. The continuous fibers 15 obtained by such a novel process are practically free from heat-sealing with one another but only mechani-



EP 1 101 854 A1



6

cally entangled with one another throughout the process to form the nonwoven fabric 26. In addition, such mechanical entanglement is not tight because the fiber is continuous, so these continuous fibers 15 moderately restrict their relative movement. The nonwoven fabric 26 made of such continuous fibers 15 offer soft and comfortable touch. The continuous fibers 15 appropriately stretched to obtain a birefringence of 0.019 ~ 0.030 have a high breaking extension since a degree at which the polypropylene molecules have been stretched is not so high that a stretchability of the continuous fibers 15 might be significantly restricted thereby. For example, a tensile test with 0 mm distance between chucks indicated that the continuous fibers 15 as a typical embodiment of this invention can be stretched to 6.38 mm. The nonwoven fabric 26 formed by mechanically entangling such continuous fibers 15 with one another under the effect of high pressure water jet streams has a breaking extension as high as 100 ~ 300 % in MD as well as in CD because of a high breaking extension of the continuous fibers 15 and a moderate intertwining among these fibers 15. The nonwoven fabric 26 as one embodiment of this invention has a breaking extension of 193 % in MD and a breaking extension of 197 % in CD.

[0022] The nonwoven fabric 26 obtained by the novel process is useful not only as disposable sanitary articles such as disposable diapers, sanitary napkins or disposable gowns to be used on the medical site but also as filters, wet wipes or the like.

[0023] The process according to this invention makes it possible to obtain a nonwoven fabric made of polypropylene having a fineness of 0.006 ~ 5.8 deniers, a birefringence of 0.019 ~ 0.030 and a tensile strength of 1 ~ 3 g/d. In this nonwoven fabric, a degree at which the polypropylene molecules are oriented in the course of spinning the continuous fibers is relatively low and, in addition, the continuous fibers are intertwined one with another not so tightly that they might significantly restrict their relative movement. Such continuous fibers offer a comfortable soft touch and a high breaking extension.

Claims

1. A nonwoven fabric made of continuous polypropylene fiber comprising:
said continuous fibers having a fineness of 0.006 ~ 5.8 deniers, a birefringence of 0.019 ~ 0.030 and a tensile breaking extension of 100 ~ 300 % wherein said fibers are subjected to substantially mechanical entanglement to maintain the form of a nonwoven fabric.
2. The nonwoven fabric according to Claim 1, wherein said nonwoven fabric has a tensile strength of 1 ~ 3 g/d.
3. A process for making a nonwoven fabric comprising

the steps of stretching continuous polypropylene fibers extruded from a plurality of nozzle orifices, accumulating said continuous polypropylene fibers on a belt travelling in one direction and entangling said continuous fibers together to obtain a desired form of a nonwoven fabric;

said process further comprising the steps of:

heating a region of an extruder in a vicinity of said nozzle substantially at a temperature of said continuous fibers being extruded in molten state;

guiding said continuous fibers through guide passage of a sucker extending through between in- and outlet thereof and being supplied with compressed air at the normal temperature discharged in a direction defined from said inlet toward said outlet;

stretching said continuous fibers along a path extending between said nozzle and said sucker and thereby reducing a fineness of said continuous fibers; and

orienting polypropylene molecules sufficiently to obtain a desired birefringence.

4. The process according to Claim 3, wherein said continuous fibers are at a temperature higher than a melting point thereof in the vicinity of said nozzle with the fineness being reduced, said temperature of said continuous fibers gradually drops approximately to said melting point as said continuous fibers flow from the vicinity of said nozzle to said inlet of said sucker and said continuous fibers are substantially stretched to obtain a desired birefringence as said continuous fibers are quenched within said sucker to the normal temperature.
5. The process according to Claim 3, wherein said step of heating comprising a step of blowing hot blast substantially at the same temperature as a temperature of said continuous fibers being extruded into a region in the vicinity of said nozzle.
6. The process according to Claim 3, wherein said continuous fibers are stretched within said sucker so that said continuous fibers may have a fineness of 0.006 ~ 5.8 deniers.
7. The process according to Claim 3, wherein said polypropylene molecules are oriented within said sucker so that said continuous fibers may have a birefringence of 0.019 ~ 0.030.
8. The process according to Claim 3, wherein said process further includes a step of intertwining said continuous fibers with one another under an effect of high pressure water jet streams.



EP 1 101 854 A1



8

9. The process according to Claim 3, wherein said belt is spaced from said nozzle by a distance of 400 ~ 600 mm.

5

10

15

20

25

30

35

40


45

50

55

5

—
ॐ
—
卩

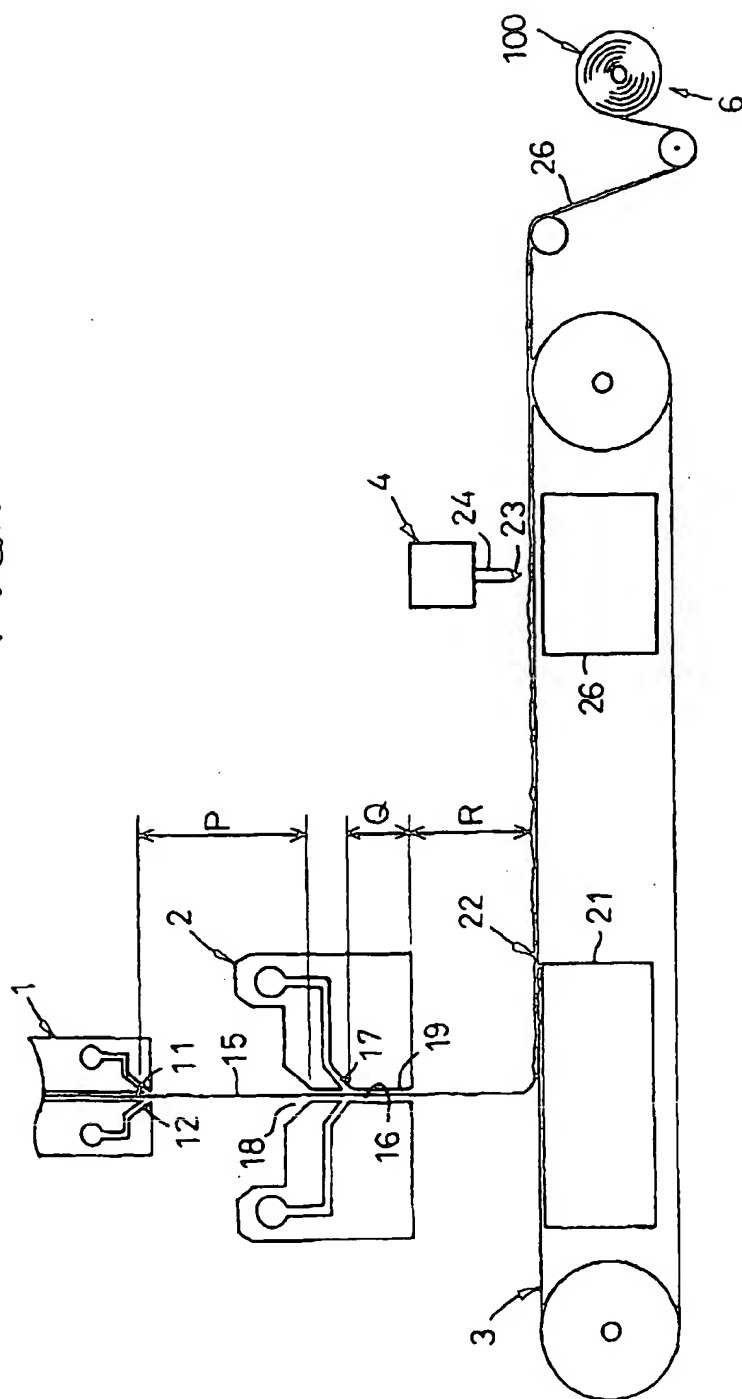

EP 1 101 854 A1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 31 0313

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 4 013 816 A (SABEE, SABEE) 22 March 1977 (1977-03-22) * the whole document *	1	D04H3/10
A	EP 0 503 590 A (IDEMITSU PETROCHEMICAL CO. LTD.) 16 September 1992 (1992-09-16) * the whole document *	1,2	
A	EP 0 725 174 A (CHISSO CORPORATION) 7 August 1996 (1996-08-07) * page 3, line 16-27 *	1,2	
A	GB 1 067 576 A (E. I. DU PONT DE NEMOURS AND COMPANY) * page 2, line 112-115; claim 1 *	1	
A	US 4 818 594 A (ALBIEN, MAURER) 4 April 1989 (1989-04-04) * abstract * * column 3, line 6-14 *	1,8	
P,A	US 6 013 223 A (SCHWARZ) 11 January 2000 (2000-01-11) * the whole document *	3-7	TECHNICAL FIELDS SEARCHED (Int.Cl.7) D04H D01F D01D
A	US 3 969 462 A (STOFAN) 13 July 1976 (1976-07-13) * column 2, line 55 - column 3, line 66; figure 1 *	3	
A	US 5 310 514 A (RUZEK, BRUCKNER) 10 May 1994 (1994-05-10) * column 6, line 31-54; figures 3,4 *	3	
A	US 4 347 206 A (ROBERTS) 31 August 1982 (1982-08-31) * the whole document *	3	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20 March 2001	Examiner Seabra, L
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.02 (10-4C011)

EP 1 101 854 A1

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 00 31 0313

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-03-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4013816 A	22-03-1977	CA 1096569 A	03-03-1981
		DE 2652789 A	02-06-1977
		FR 2332357 A	17-06-1977
		GB 1569119 A	11-06-1980
EP 0503590 A	16-09-1992	JP 2829147 B	25-11-1998
		JP 6341045 A	13-12-1994
		US 5292389 A	08-03-1994
EP 0725174 A	07-08-1996	JP 8209533 A	13-08-1996
		CN 1135540 A	13-11-1996
		DE 69601817 D	29-04-1999
		DE 69601817 T	05-08-1999
		US 5981068 A	09-11-1999
GB 1067576 A		BE 644588 A	02-09-1964
		DE 1546424 A	19-11-1970
		DE 1785550 A	06-04-1972
		FR 1383793 A	09-04-1965
		GB 1067577 A	
		LU 44357 A	30-08-1964
		NL 297313 A	
		NL 297319 A	
		US 3276944 A	04-10-1966
		JP 48032986 B	11-10-1973
US 4818594 A	04-04-1989	NL 140579 B	17-12-1973
		DE 3630392 C	11-02-1988
		AT 69073 T	15-11-1991
		CA 1311889 A	29-12-1992
		DE 3774218 A	05-12-1991
		EP 0259692 A	16-03-1988
		ES 2026501 T	01-05-1992
US 6013223 A	11-01-2000	NO 873713 A, B,	07-03-1988
		NONE	
US 3969462 A	13-07-1976	US 3858386 A	07-01-1975
		CA 1037672 A	05-09-1978
		GB 1382499 A	05-02-1975
US 5310514 A	10-05-1994	DE 3941824 A	27-06-1991
		AT 107971 T	15-07-1994
		WO 9109162 A	27-06-1991
		DE 59006327 D	04-08-1994
		EP 0541552 A	19-05-1993

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

EP 1 101 854 A1

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 31 0313

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-03-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5310514 A		JP 2918332 B JP 5502483 T	12-07-1999 28-04-1993
US 4347206 A	31-08-1982	US 4303606 A US 4347207 A	01-12-1981 31-08-1982

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82